4043-A AND 4043-B VALVE

TRIODE.

For replacement purposes only.
Replaced by 4043-C and -D valves.

SPECIFICATION.

Cathode.


Oxide coated filament.
Constant voltage type.

Base.


4043-A American medium 4-pin.
4043-B standard British 4-pin.

Dimensions.

Overall length	5¾" (14·6 cms.)
Maximum diameter	1⅞" (4·8 cms.)
Net weight	0·2 lbs. (90 gms.)

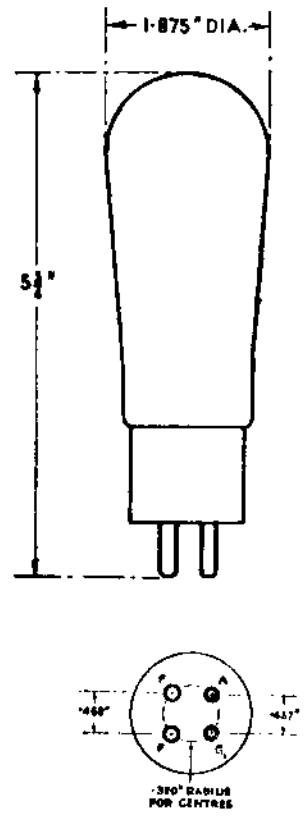

4043-A

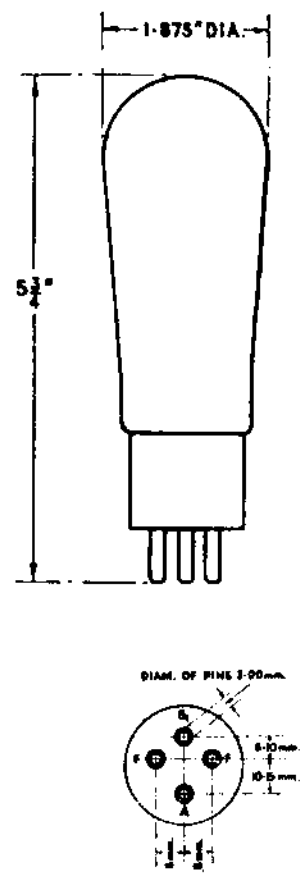

4043-B

Constants.

Filament voltage	7·5 volts
Nominal filament current	1·2 amps.
*Impedance	3,500 ohms
*Amplification factor	8
Grid–anode capacity	13·3 $\mu\mu$F.
Anode–filament capacity	4·8 $\mu\mu$F.
Grid–filament capacity	7·0 $\mu\mu$F.

* *at anode current of* 0·050 *amps.*

LIMITING CONDITIONS FOR SAFE OPERATION.

Maximum direct anode voltage	600 volts
Maximum direct anode current	0·110 amps.
Maximum anode dissipation	35 watts
Maximum direct grid current	0·030 amps.
Maximum frequency for above ratings	2 Mc.
Maximum anode voltage for frequency of 10 Mc.	500 volts

V.4043-AB.1
Nov. 1937

—Standard Valves—

TYPICAL OPERATING CONDITIONS.


	Class B A.F. Amp. and Mod. For balanced 2 valve circuit
Direct anode voltage	600 volts
Grid bias	—55 to —65 volts
Anode current per valve—zero signal	0·012 amps.
Anode current per valve—maximum signal	0·090 amps.
Anode dissipation	25 watts
Load resistance—anode to anode	6,000 ohms
Maximum output—2 valves	60 watts


RADIO FREQUENCY OPERATION.

	Class B Telephony	Class C Telephony	Class C Telegraphy
	Modulated carrier applied to grid	Subject to anode modulation	Unmodulated
Direct anode voltage	600	400	600 volts
Direct anode current	0·087	0·131	0·130 amps.
Grid bias	—65	—100	—150 to —200 volts
Anode dissipation	35	17·5	26 watts
Carrier output	17·5	35	52 watts

PRINTED IN ENGLAND

—Standard Valves—

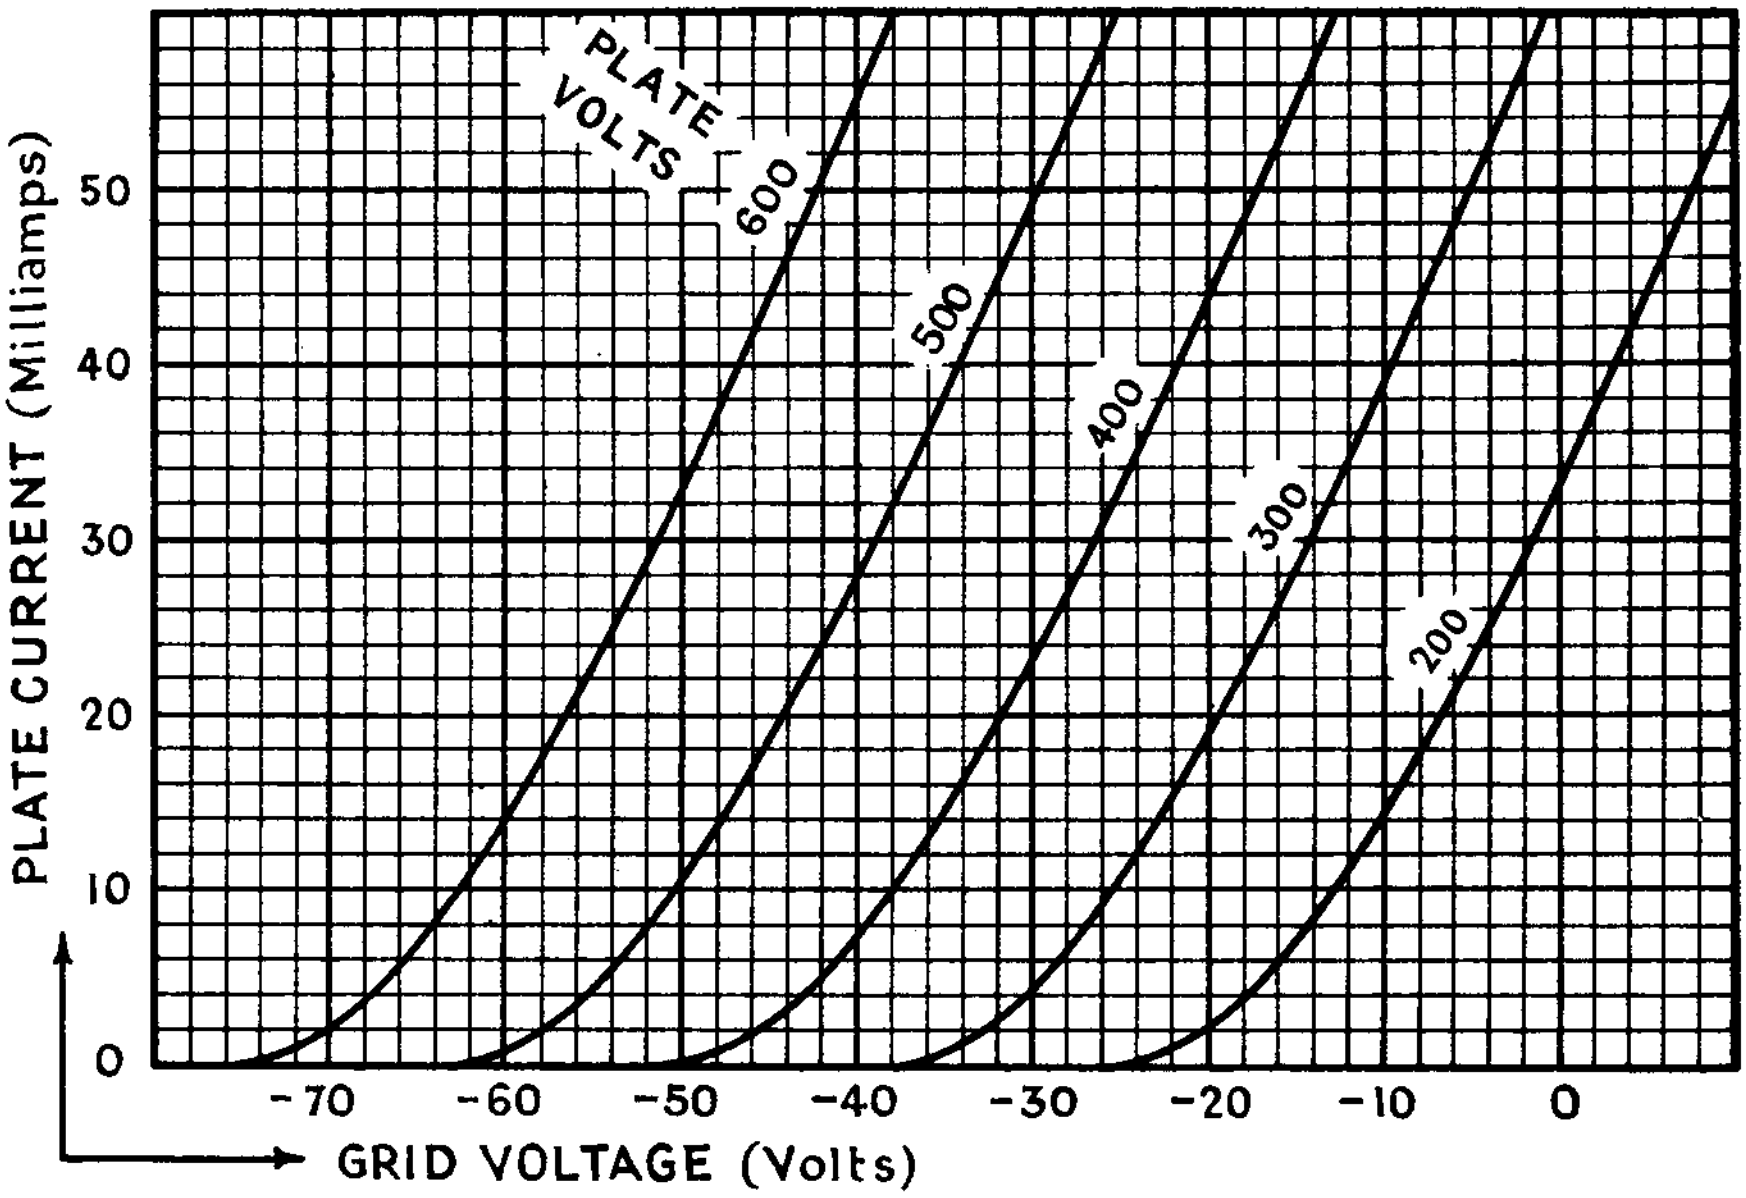

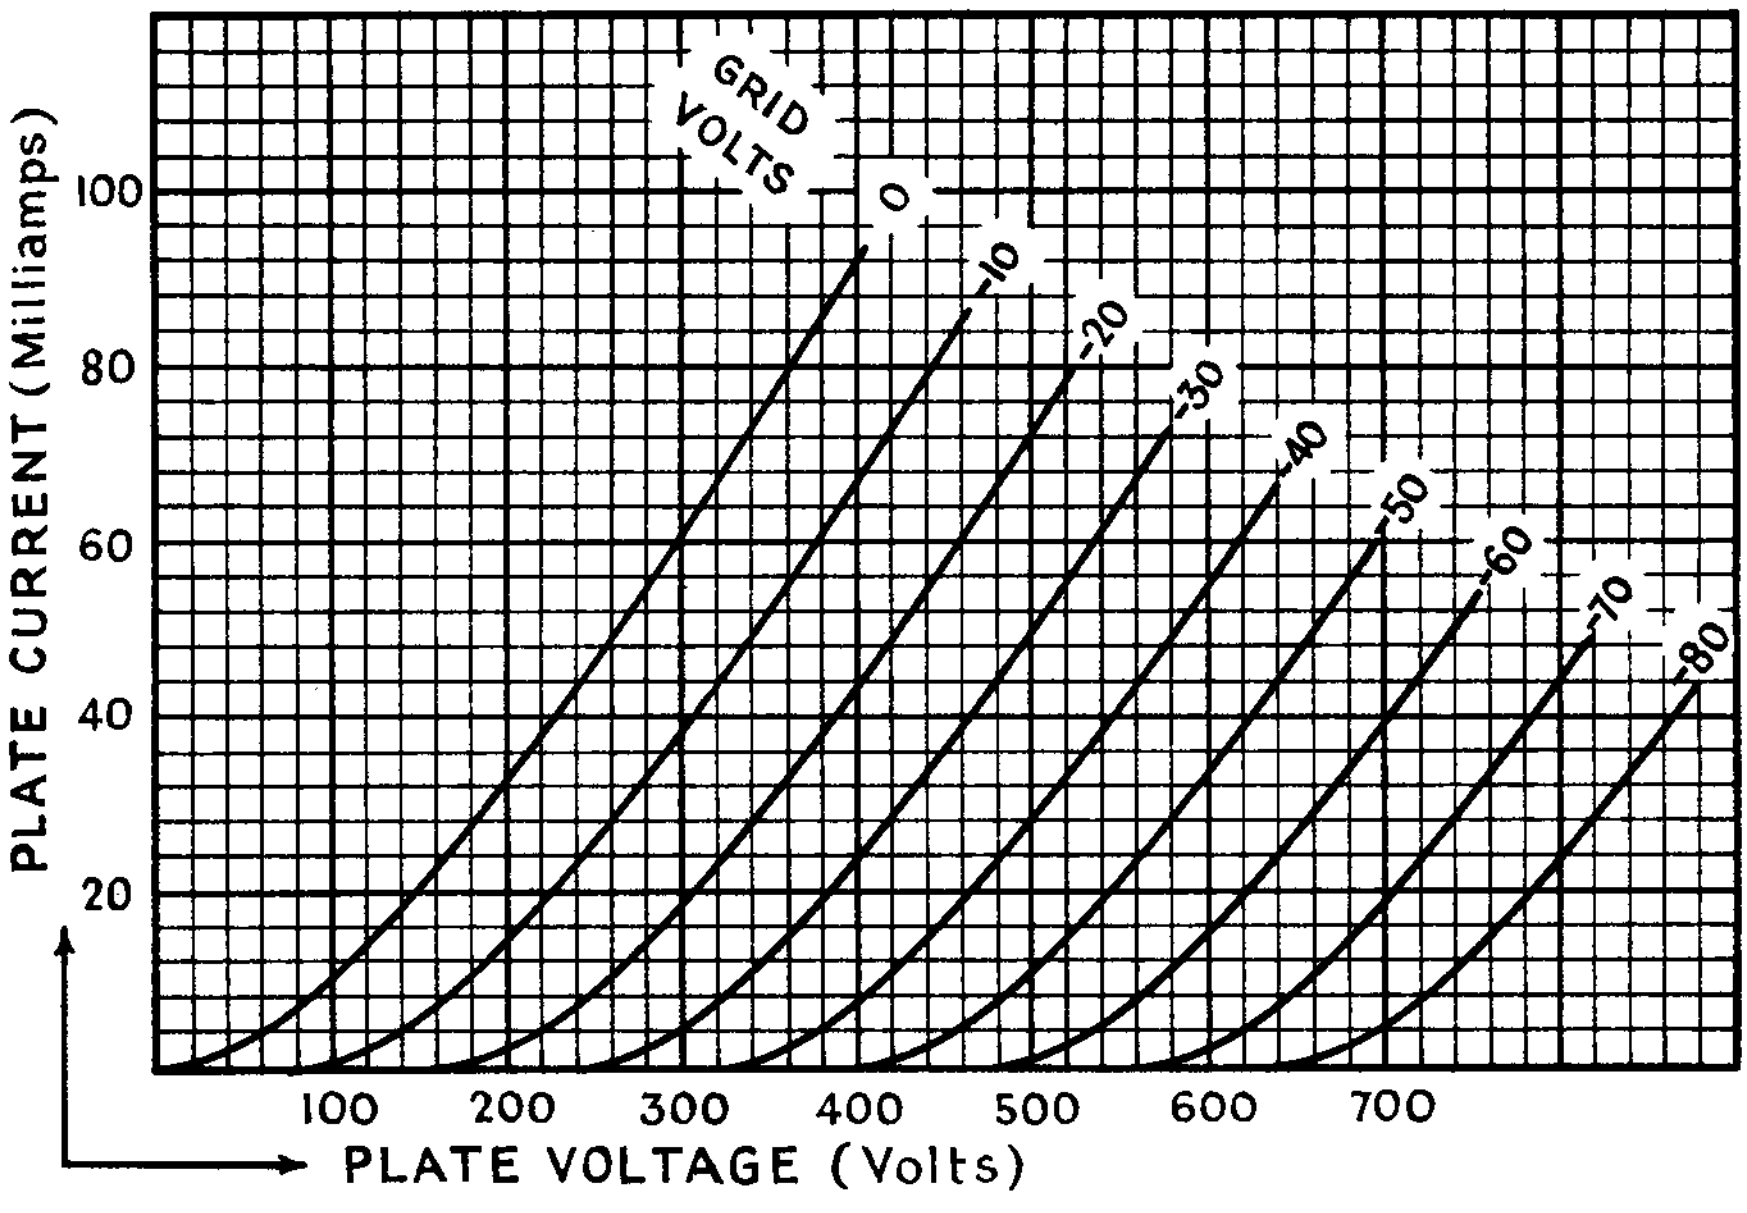

PRINTED IN
ENGLAND